

440-0112-972		Sht. 1 of 1	APP'D BY JBR
ISSUE	EDO NO.	APP'D	DATE
1	6-95-242	JBR	6-14-95

PRECALIBRATION INFORMATION SHEET

PRECALIBRATION IS AVAILABLE IN THE FOLLOWING APPLICATIONS:


1. CONDUCTING LIQUIDS
2. INSULATING LIQUIDS USING CONCENTRIC SHIELD SENSING ELEMENT
3. INTERFACE

COMPANY _____ CITY _____ STATE _____
 CUSTOMER P.O.# _____ ITEM _____ DE# _____ TAG NO. _____
 FILLED OUT BY _____ DATE _____ TELEPHONE (_____) _____

FILL IN THE MISSING DIMENSIONS:

- "A" _____ NOT REQUIRED IF GREATER THAN 12"
 "B" _____ NOT REQUIRED IF LESS THAN 6"
 "C" _____
 "D" _____
 "Z" _____ NOT REQUIRED IF AT TIP

NOZZLE DIA.: _____ NOT REQUIRED IF GREATER THAN 2" OR IF SENSING ELEMENT IS THREADED INTO VESSEL.

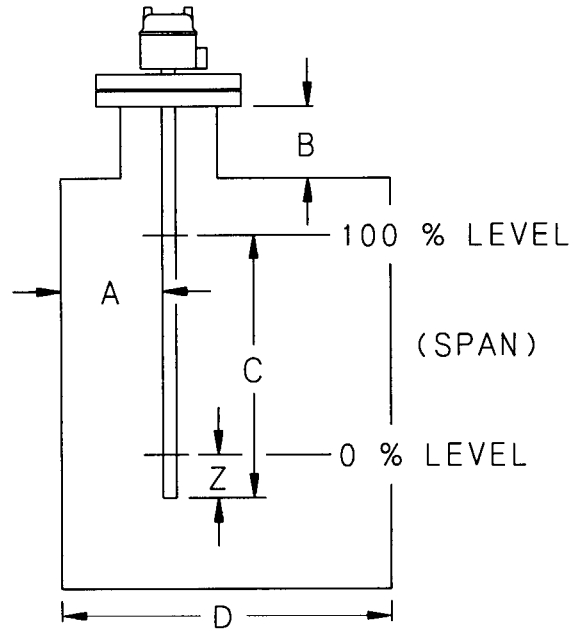

CHECK HERE IF HORIZONTAL CYLINDER

YES NO IS A PERMANENT CALIBRATION REFERENCE BOX (401-6-6) DESIRED?

MATERIAL SPECIFICATIONS

	MATERIAL	ELECTRICAL CHARACTERISTICS IF KNOWN	
		CONDUCTIVITY*	DIELECTRIC CONSTANT*
UPPER PHASE			
LOWER PHASE			

*IF CONDUCTIVITY GREATER THAN 200 μMHOS/CM OR WATER CONTENT IS GREATER THAN 20%, FILL IN "N/A".